




WARNING

Copy Right by C.S.M. Inc. Not the Written Agreement Please do not Copy, All Rights Reserved 11234718 Requests

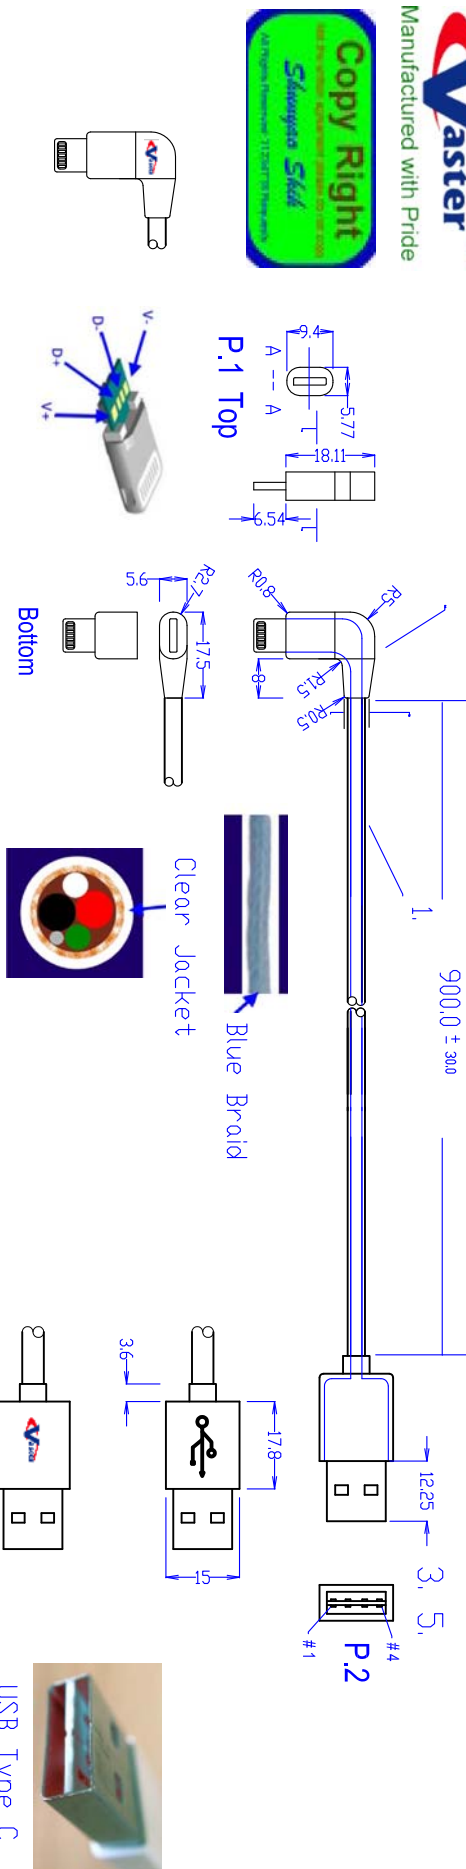

USB Type C Connector


Electrical Properties

1. It shall be not have any open/short, miswriting and Intermittent failures.
2. The cable shall be 100% electrical test.
3. Voltage test : DC 300V, Insulation resistance : 50M ohm/Min ; Conductance resistance : 50M ohm/Max;

Machinery Character :

1. All dimension are "mm" except specified.
2. The cable should be clean, free of oiled/Flash/burred.
3. Cable Ass'y shall be Rohs Compliant.

6	Shell : Lightning ABS Shell, Color Translucent Blue Color	Pcs	1
5	Shell : USB AM ABS Shell, Color : Translucent Blue Color	Pcs	1
4	TPE : 45P TPE Color : Translucent Blue Color	G	4
3	P2 Connector : USB Type C Connector Male, Pin G/F	Pcs	1
2	P1 Connector : 8Pin Lightning Male (C48)	Pcs	1
1	Cable : 30AWG(19/0.05TC+250D)*P+24AWG(6E/0.11TC+250D)*IC+AL/NY+DW(19/0.05TC+250D)*3C+Braid, OD=2.6 0.15mm Jacket TPE, Color Translucent Blue	Pcs	1
Item	Description	UNIT	QTY

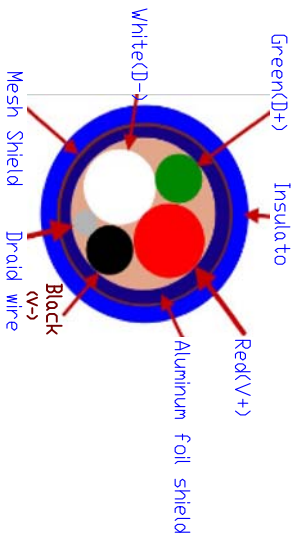

PIN OUT	
1	Red(V+)
2	White(D-)
3	Green(D+)
4	Black(V-)
5	D,W+Braid

Vaster SKU : 88777-RI-1M

Description : Vaster iPhone iPod iPad 8Pin Lightning USB Sync & Charging Angle Cable

Designed By : Shun Date: 01-12-2014

Unit : mm Rev A

UPC Code : 670561809888

Client :

Audit: Date:

Sheet : Letter

Approved Richard Date:



Drawing No : VTY20140112-IRPC

Cable Specialists & MFG (USA) Inc